
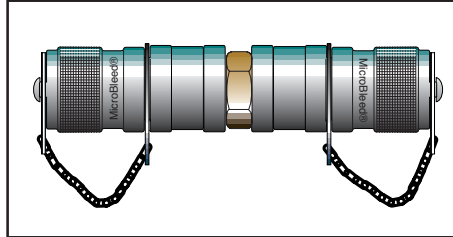


MicroBleed® HoseLink™s are designed to link two or more **MicroBleed®** hoses together for extended runs.

Like all **MicroBleed®** products, the HoseLink™ will not permit oil through-flow until all connections are safely secured.

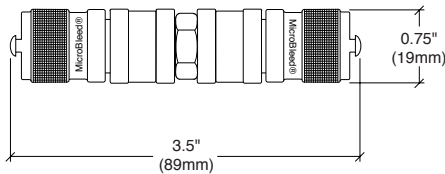



**MicroBleed®
HoseLink™**
*Pressure Rating:
5000 PSI (345 bar)*

Part Number	Description
STB-MBHL	MicroBleed® HoseLink™

In addition to using the **MicroBleed®** valve to de-energize a hydraulic system and bleed air from hydraulic components, the versatility of the **MicroBleed®** valve is extended to checking pressure wherever a **MicroBleed®** valve is located in the system. For added convenience, the pressure gauge is capable of rotating 180°.

**Safe-T-Bleed®
PressureChek™
Assembly**

Simply screw the compact **Safe-T-Bleed® PressureChek™** assembly into any **MicroBleed®** valve, under full system pressure, and check pressure - it's that simple; no fuss and no mess!

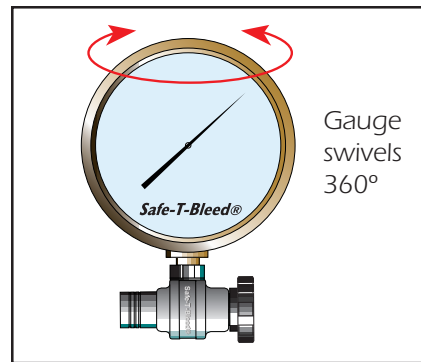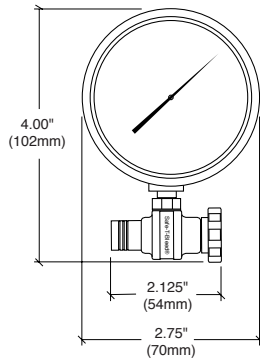

Part Number	Pressure (PSI/bar)
STB-PCA-100	0 - 100 PSI (7 bar)
STB-PCA-200	0 - 200 PSI (14 bar)
STB-PCA-2000	0 - 2000 PSI (138 bar)
STB-PCA-3000	0 - 3000 PSI (207 bar)
STB-PCA-5000	0 - 5000 PSI (345 bar)