


MicroBleed® Valves

Pressure Rating:
5000 PSI (345 bar)

MicroBleed® valves are the most versatile valves in the world, with regard to form and function.

You can simply connect any number of standard hydraulic connectors to a MicroBleed® valve to arrive at a thread configuration of your choosing. This feature substantially reduces inventory, inventory administration, shelf space, and associated costs.

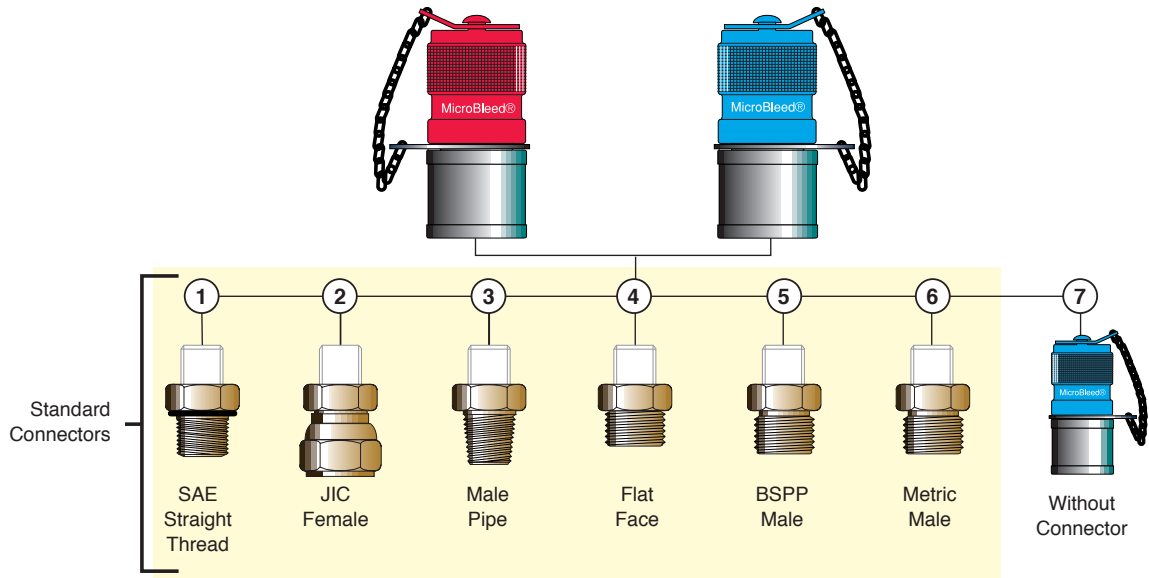

NOTE: Convert a MicroBleed® valve to any one of these thread configurations. MicroBleed® valves have a standard 7/16 SAE female thread. MicroBleed® valves can be purchased with or without items 1-6.

Item	Part Number	Description & Size	ColorGard™ cap color
1	STB-SS4-R	MicroBleed® valve SAE straight thread #4	RED
	STB-SS4-B	MicroBleed® valve SAE straight thread #4	BLUE
	STB-SS6-R	MicroBleed® valve SAE straight thread #6	RED
	STB-SS6-B	MicroBleed® valve SAE straight thread #6	BLUE
2	STB-SFS4-R	MicroBleed® valve JIC female swivel #4	RED
	STB-SFS4-B	MicroBleed® valve JIC female swivel #4	BLUE
	STB-SFS6-R	MicroBleed® valve JIC female swivel #6	RED
	STB-SFS6-B	MicroBleed® valve JIC female swivel #6	BLUE
3	STB-NM1/8-R	MicroBleed® valve NPT male pipe 1/8"	RED
	STB-NM1/8-B	MicroBleed® valve NPT male pipe 1/8"	BLUE
	STB-NM1/4-R	MicroBleed® valve NPT male pipe 1/4"	RED
	STB-NM1/4-B	MicroBleed® valve NPT male pipe 1/4"	BLUE
	STB-NM3/8-R	MicroBleed® valve NPT male pipe 3/8"	RED
	STB-NM-3/8-B	MicroBleed® valve NPT male pipe 3/8"	BLUE

MicroBleed[®] Valves

Item	Part Number	Description & Size	ColorGard™ cap color
4	STB-FF4-R	MicroBleed [®] valve flat-face male #4	RED
	STB-FF4-B	MicroBleed [®] valve flat-face male #4	BLUE
	STB-FF6-R	MicroBleed [®] valve flat-face male #6	RED
	STB-FF6-B	MicroBleed [®] valve flat-face male #6	BLUE
5	STB-BM1/4-R	MicroBleed [®] valve BSPP male 1/4	RED
	STB-BM1/4-B	MicroBleed [®] valve BSPP male 1/4	BLUE
	STB-BM3/8-R	MicroBleed [®] valve BSPP male 3/8	RED
	STB-BM3/8-B	MicroBleed [®] valve BSPP male 3/8	BLUE
6	STB-MM10-R	MicroBleed [®] valve metric male 10x1.0	RED
	STB-MM10-B	MicroBleed [®] valve metric male 10x1.0	BLUE
	STB-MM12-R	MicroBleed [®] valve metric male 12x1.5	RED
	STB-MM12-B	MicroBleed [®] valve metric male 12x1.5	BLUE
	STB-MM14-R	MicroBleed [®] valve metric male 14x1.5	RED
	STB-MM14-B	MicroBleed [®] valve metric male 14x1.5	BLUE
*7	STB-F4-R	MicroBleed [®] valve with standard 7/16-UNF female thread - SAE #4	RED
	STB-F4-B	MicroBleed [®] valve with standard 7/16-UNF female thread - SAE #4	BLUE

- NOTE:**
- *Add the suffix "-S" for stainless steel connector.
 - If you do not see the thread size or type you need, contact a **Safe-T-Bleed[®]** sales associate for further assistance.

WARNING:

MicroBleed[®] valves are non-repairable. Any attempt to disassemble a MicroBleed[®] valve will render it unsafe for service.

